


**Power cable**

**N2XS(F)2Y 20kV**

Medium-voltage cable, XLPE insulated, copper conductor, longitudinal water blocked screen, PE outersheath

12/20 kV

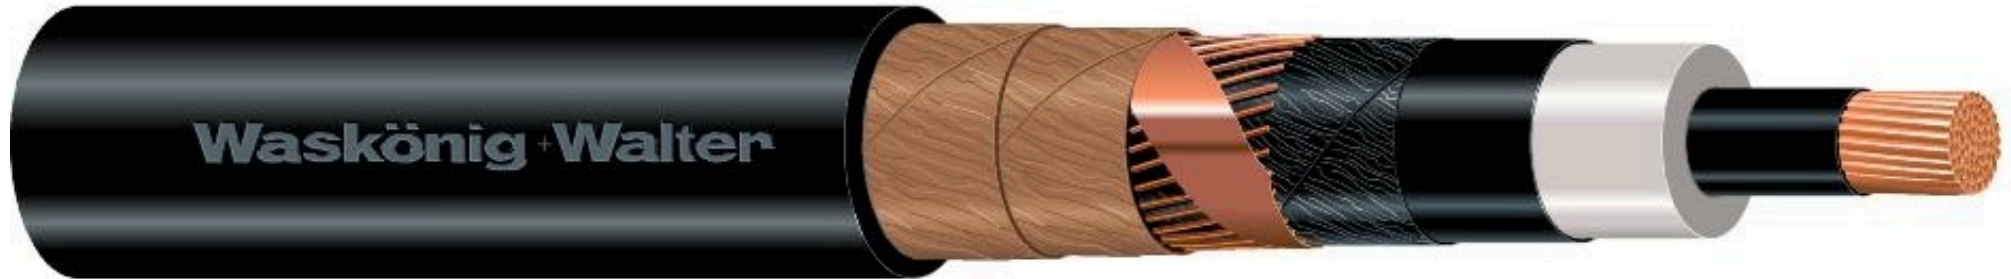

According to VDE 0276 part 620.

Characteristics	Properties	Unit
Conductor material	Copper	
Conductor surface	Bare	
Conductor category	Class 2 = stranded	
Shape of conductor	Round	
Number of cores	1	
Core identification according to HD 308 S2	No	
Core identification	None	
Laminated sheath	No	
Fibre optic elements	No	
Protective conductor	No	
Inner semi-conducting layer	Yes	
Outer semi-conducting layer	Yes	

Characteristics	Properties	Unit
Screen	Yes	
Concentric conductor	None	
Armouring	No	
Material outer sheath	Polyolefin	
Specification material outer sheath	Polyethylene (PE)	
Colour outer sheath	Black	
Conductive coating	No	
Longitudinal water blocking conductors	No	
Longitudinal water blocking screen	Yes	
Reaction-to-fire according to EN 13501-6: Class	Fca	
Halogen free (acc. EN 60754-1/2)	Yes	
Flame retardant	No	
Low smoke (acc. EN 61034-2)	No	
Max. conductor temperature	90	°C
Permitted cable outer temperature during assembling/handling	-20 <=> 70	°C
Nominal voltage U0	12	kV
Nominal voltage U	20	kV
max. short circuit temperature	250	°C
Insulation	XLPE (VPE)	
Minimum bending radius	15	x Außen-Ø

Product					Packaging		
Nominal cross section conductor (in mm²)	Min. permitted bending radius, stationary application/permanent installation (in mm)	Nominal cross section concentric conductor (in mm²)	Outer diameter approx. (in mm)	Weight (in kg/km)	Packing	Individual length (in m)	Net weight (in kg)
240	615	25	40	3,047.5	Ring, Drum	Cut length	3,049
300	645		42	3,640.9	Ring, Drum	Cut length	3,634

Product					Packaging		
Nominal cross section conductor (in mm <sup>2</sup> )	Min. permitted bending radius, stationary application/permanent installation (in mm)	Nominal cross section concentric conductor (in mm <sup>2</sup> )	Outer diameter approx. (in mm)	Weight (in kg/km)	Packing	Individual length (in m)	Net weight (in kg)
400	690		46	4,540.9	Ring, Drum	Cut length	4,542
500	735	35	49	5,578.1	Ring, Drum	Cut length	5,579
630			53	7,091.81	Ring, Drum	Cut length	7,060